
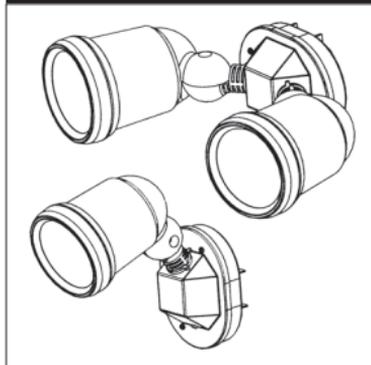
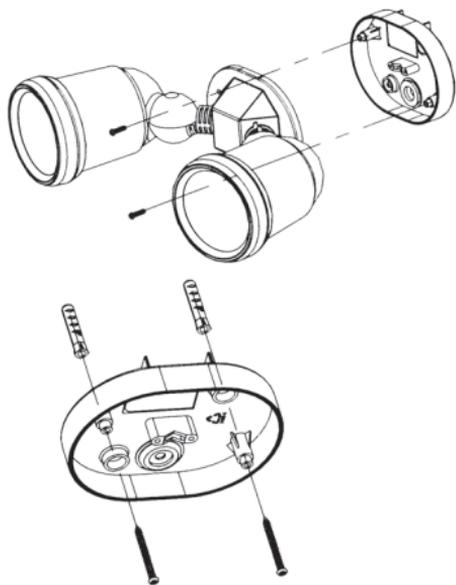
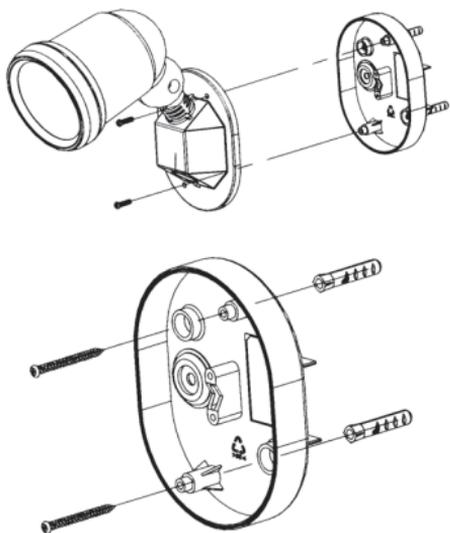
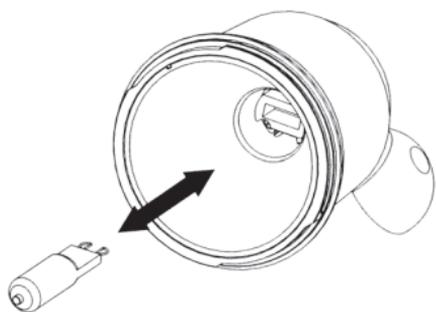


**HALOGEN SPOT LIGHT
INSTALLATION MANUAL**

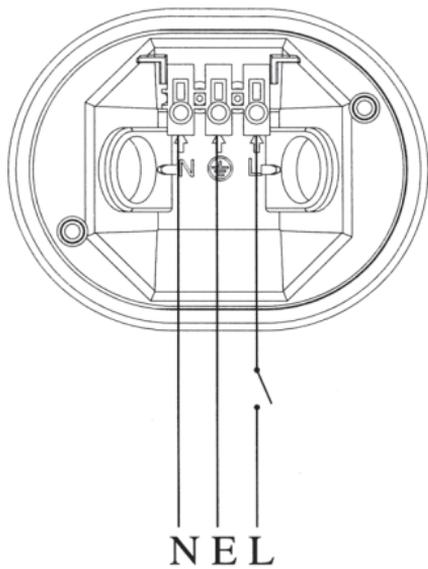

LHT0136 LHT0137
LHT0138 LHT0139

A**B****C****D**

MANUFACTURER'S EXTENDED WARRANTY

"Our Goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the Goods repaired or replaced if the Goods fail to be of acceptable quality and the failure does not amount to a major failure"

HALOGEN SPOT LIGHT INSTALLATION MANUAL

Unit is for outdoor use only. Unit must be mounted on a non-flammable surface as a fixed luminaire, and is not suitable for portable use.

The unit can get very hot during use. Ensure the unit has cooled before handling.

Ensure adequate ventilation space is allowed between the unit any object above, in front or to either side of the unit. Suggested space is 0.5m above, 0.3m to either side & 1.0m in front. If in any doubt, consult a qualified tradesperson or electrician.

*** IMPORTANT ***

Switch off the electricity at the fuse box by removing the relevant fuse or switching off the circuit breaker before proceeding with the installation.

BULB INSTALLATION

Unscrew the glass cover housing from each lamp by turning the glass cover anti-clockwise. Install the G9 halogen bulb, making sure not to touch the bulb with bare hands. It is suggested that the bulb is handled using a dry and soft cloth. Insert halogen bulb into socket, press firmly into place. Ensure the bulb is correctly fitted in the lampholder before use (diagram C). Re-attach the glass cover housing by turning it clockwise until it locks into place.

UNIT INSTALLATION & CONNECTION

Remove the wall bracket from the unit by loosening the front screws on the junction box (refer diagram A or B).

Put the wall bracket at the mounting location (wall) and mark the position of the fitting holes. Drill the holes. Insert the wall plugs into the holes.

Pierce the entry grommet and pass the cable through the wall bracket before mounting (cable should extend approx. 100mm through the bracket). Fit grommet into its location hole ensuring a good seal.

Fix wall bracket to the wall. Take care not to over-tighten the screws to prevent damage to the wall bracket. If using a power screwdriver be sure to use the lowest torque setting.

Connect the cable to the terminal block as follows (see diagram D):

NEUTRAL (Blue)	N
LIVE (Brown)	L
EARTH (Green/Yellow)	 E

Ensure the connectors are secure. Affix the cable clamp.

Re-attach the unit to the wall bracket by fasten the front cover screws.

TECHNICAL SPECIFICATIONS

Power Supply	220~240 V AC ~ 50Hz
Lamp Type	240V AC 75W G9 Halogen Lamp
Environmental Protection	IP44 (suitable for outdoor use)

In the event of the cover glass shattering, do not replace with normal household glass.
Contact the Simx helpline for replacement details.

If you experience problems check the wiring connections and that the lamp is seated correctly. If problems still exist, do not return to store.

Telephone the Simx Customer Helpline

NZL: 64 9 259 1662

Weekdays 9.00am – 5.00pm

Email: sales@simx.co.nz

Website: www.simx.co.nz

Qualified Customer Support Co-ordinators will be on-line to assist in resolving your query.