



Through Wall Fan Kits - SELV and Auto Shutter


These fan kits are easy to install and are designed to be ducted straight through an exterior wall. SELV (safety extra low voltage) fans are for use in wet area zones 1, 2 and 3 and incorporate a 12V AC motor and a 12V AC isolating transformer. Auto shutter models have automated backflow prevention vanes. All kits include a weatherproof cowl. 5 year warranty.

SELV (Safety Extra Low Voltage)

Pro-Series Low Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Fascia	Switching	Model	Order Code
					(l/s)	(m³/hr)						
	150	Axial	20	60	101	364	0.20	40	Square	Standard	XPLP150SLV	FAN5894
											Round	XPLP150CLV
	125	Axial	20	35	36	130	0.56	41	Square	Standard	XPLP125SLV	FAN5887
											Round	XPLP125CLV

Classic Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Fascia	Switching	Model	Order Code
					(l/s)	(m³/hr)						
	150	Axial	20	60	101	364	0.20	40	Square	Standard	XP150LV	FAN5895
	125	Axial	20	35	36	130	0.56	41	Square	Standard	XP125LV	FAN5889
	100	Axial	20	20	23	85	0.87	41	Square	Standard	XP100LV	FAN5882

Auto Shutter

Classic Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Fascia	Switching	Model	Order Code
					(l/s)	(m³/hr)						
	300	Axial	82	60	306	1100	0.27	60	Square	Standard	XPS300A	FAN2043
	230	Axial	45	50	152	550	0.30	50	Square	Standard	XPS230A	FAN0348
										Standard	XP150A	FAN0136
150	Axial	25	60	87	313	0.29	40	Square	Pull Cord	XP150AP	FAN0137	
									Timer	XP150AT	FAN0138	

Note: Installed system performance is always influenced by duct length and layout


Switching Options

Standard Remote switch (not supplied).

Timer Remote switch (not supplied). Fan continues operating for preset time after switching off. 150mm models include fixed 7 minute timer. 125mm and 100mm model timers are 1-20 minute adjustable and require permanent and switched phase.

Pull Cord Integral part of fan.


Accessories

Fascia	Model	Duct	Round		Square		
			White	Chrome	White	Satin Silver	Chrome
	XFLP	150mm	FAN0750	-	FAN0749	FAN2071	FAN0598
		125mm	FAN0748	FAN0757	FAN0747	FAN2068	FAN0755

Through Wall Fan Kits - SELV and Auto Shutter

Dimensions (mm)

Model	Cut-Out Size	A	B	C	D	E	F	G	H
XPLP150	173	174	30	150	375	150	132	10	191
XPLP125	140	160	30	125	375	118	128	10	161
XPS300	310	350	50	230	375	300	156	81	362
XPS230	265	286	30	250	375	230	141	75	586
XP150	160	174	30	150	375	148	74	27	200
XP150A	160	174	30	150	375	148	90	55	200
XP125	140	160	30	125	375	118	74	27	168
XP100	112	138	30	100	375	98	74	27	155

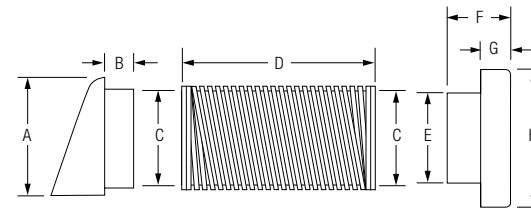

XPLP / XP

Technical

Model	XPLP	XPS	XP
Supply	SELV	12V DC	
	Auto Shutter	220-240V AC, 50Hz	
Max. Operating Temp	50°C	50°C	50°C
IP Rating	IPX4	IPX4	IPX4
Exterior Grille	Weatherproof Cowl	White Fixed Grille	Weatherproof Cowl
Duct	Aluminium Semi-Rigid	Aluminium Semi-Rigid	Aluminium Semi-Rigid
Duct Length	375mm	375mm	375mm