

CONTROL YOUR CLIMATE

Comprehensive humidity control for protection against moisture, mould and mildew with multiple comfort add-on options

OVERVIEW

A premium ventilation system with insulated and acoustic duct, wireless app control, four wireless sensors, rental lock, advanced touch screen, intuitive dew point control, efficient and economical EC fans, compatible with comfort add-ons.

BEST FOR

Larger homes that need more flexibility with indoor sensor placement and system add-ons, or situations where you want the controller placed anywhere. It's our most powerful and user-friendly positive pressure system.

SMARTVENT POSITIVE ADVANCE RANGE

What is the size of your home (m²)?	Number of Rooms	Fans	Model	Order Code
Up to 100m²	2	1	SV02AD	FAN7520
	3		SV02AD with 1 Extension Kit	
Up to 280m²	4	1	SV04AD	FAN7521
	5		SV04AD with 1 Extension Kit	
	6		SV04AD with 2 Extension Kits	
Up to 560m²	6	2	SV06AD	FAN7522
	7		SV06AD with 1 Extension Kit	
	8		SV06AD with 2 Extension Kits	
	9		SV06AD with 3 Extension Kits	
	10		SV06AD with 4 Extension Kits	
	11		SV06AD with 5 Extension Kits	
	12		SV06AD with 6 Extension Kits	

Specifications	SV02AD	SV04AD	SV06AD
Fan Type	EC	EC	EC
Spigot Size	150mm	200mm	200mm
Fan Speeds	Infinitely Variable		
Max. Air Flow per Fan @ 0 Pa	175 l/s, 630m³/hr	284 l/s, 1023m³/hr	284 l/s, 1023m³/hr
Max. Air Flow per Fan @ 150 Pa	132 l/s, 475m³/hr	206 l/s, 742m³/hr	206 l/s, 742m³/hr
Max. Static Pressure per Fan	568 Pa	461 Pa	461 Pa
Input Power per Fan	67W	85W	85W
Current (A) per Fan	0.29A	0.7A	0.7A
Operating Temp	-25°C to 50°C		
Sound Level	47 dB(A)	53 dB(A)	53 dB(A)

ADD-ONS


	Additional Room Kit - 3m	Additional Room Kit - 6m	Additional Room Kit - Through Wall	Additional Fan Kits	Flexi Air Source (Summer Kit)	Heat Transfer	Tempering Heater Small (1kW)*	Tempering Heater Large (2kW)*	Through Wall Grille
SV02AD	DCT2276	DCT2667	DCT2286	FAN5836	DCT0299	FAN2027	DCT3478	-	DCT2286
SV04AD	DCT2276	DCT2667	DCT2286	FAN5836	DCT2128	FAN2028	DCT3231	DCT3230	DCT2286
SV06AD	DCT2276	DCT2667	DCT2286	FAN5836	DCT2135	FAN4438	DCT3418	DCT4613	DCT2286

*Larger systems for homes above 280m² with two fans may require two tempering heaters (one for each fan). See selection page for more options.




Features	
App Control	
WiFi Connect	
Dew Point Control	
Humidity Sensing	x4
Temperature Sensing	x4
Low Temperature Protection	
Auto or Manual Operation	
Boost Control	
Filter Change Alert	
Screen Brightness Control	
Scheduler	
Filter Replacement	
F7 Standard Filter	DCT2093
F7 HEPA Filter with Carbon	DCT2278
F7 Standard Filter with Carbon	DCT2277

SV02AD

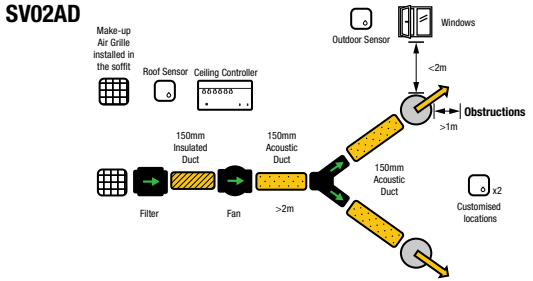


Positive Advance Componentry	2 Room
150mm Supply Diffuser	2
150mm Fixed Grille	1
F7 Filter	1
10 Speed EC Fan	1x 150mm
Insulated Ducting	1x 150mm x 3m
Acoustic Insulated Ducting	1x 150mm x 6m
150/150/150mm Y-Branch	1
Wireless Sensors	4
Wall Controller with Cable	-
Ceiling Controller	1

SV04AD

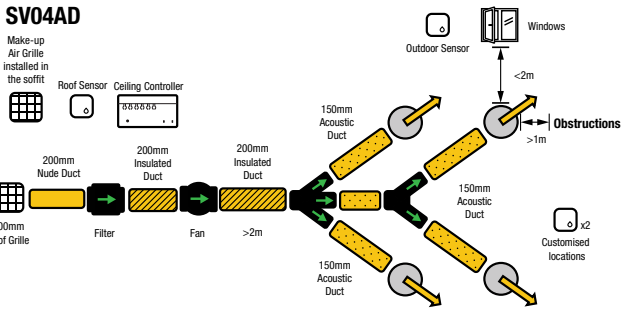

Positive Advance Componentry	4 Room
150mm Supply Diffuser	4
150mm Fixed Grille	1
200mm Fixed Grille	1
F7 Filter	1
10 Speed EC Fan	1x 200mm
Nude Ducting	1x 200mm x 3m
Insulated Ducting	1x 200mm x 3m
Acoustic Insulated Ducting	3x 150mm x 6m
150/150/150mm Y-Branch	1
200/150/150/150mm Double Branch	1
150mm Duct Joiner	1
Wireless Sensors	4
Wall Controller with Cable	-
Ceiling Controller	1

SV06AD

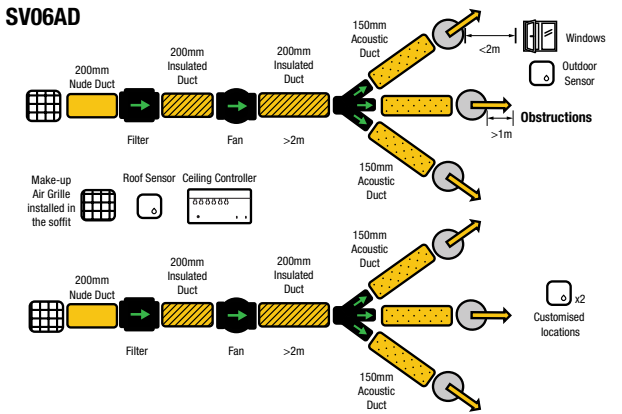

Positive Advance Componentry	6 Room
150mm Supply Diffuser	6
200mm Fixed Grille	3
F7 Filter	2
10 Speed EC Fan	2x 200mm
Nude Ducting	1x 200mm x 6m
Insulated Ducting	1x 200mm x 6m
Acoustic Insulated Ducting	4x 150mm x 6m
200/150/150/150mm Double Branch	2
150mm Duct Joiner	2
Wireless Sensors	4
Wall Controller with Cable	-
Ceiling Controller	1

*Distance from obstructions such as
 Security Sensors Smoke Detectors Walls SV Positive Advance Sensor