

DATA SHEET

ALVA UDL 2x13° 10W 4K WH ON/OFF

Item number

EL10830037


GTIN

4015120830037



Technical data

GENERAL	
Device category	Up-/Downlight
Remote controllable	–
Conformity	CE, EAC, RoHS, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Surface mounting
Installation position	Wall
Type of connection	Push terminal
Connectable wire cross section	1,50 - 2,50 mm ²
HOUSING	
Dimensions	Length 176 mm x Width 100 mm x Height/Depth 160 mm
Weight	1567 g
Material	powder-coated aluminium
Protection type	IP65
Permissible ambient temperature	-25 °C...+40 °C
Impact resistance	IK09
Colour	white, similar to RAL 9016
Glow wire test in accordance with IEC 60695-2-10	650 °C

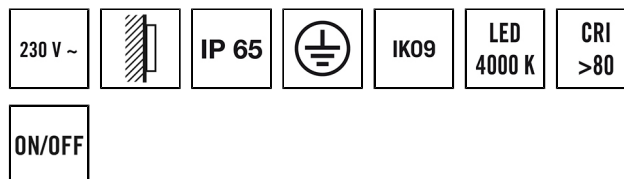

Product description

- LED up/downlight made from high-quality aluminium
- Dirt-repellent thanks to powder coating with lotus effect
- Beam angle: 2 x 13°

Offers special product features like:

- Protected against sea air

ELECTRICAL VERSION

Control system	ON/OFF
Protection class	I
Nominal voltage	230 V / 50 Hz
In-rush current	6 A / 369 µs
Leakage current	0,017 mA
Power consumption	70 mA

LIGHT


Diffusor	transparent
Light emission	direct/indirect
Beam angle	13 °
Flicker factor	<10 %
Rated output P	10 W
Luminous Flux (light)	1050 lm
Luminous efficacy	105,00 lm/W
Colour temperature	4000 K
Colour rendering index Ra	> 80
Colour tolerance	SDCM < 3
Color Quality Scale	80
Energy efficiency class	A++ to A

DATA SHEET

ALVA UDL 2x13° 10W 4K WH ON/OFF

Item number **GTIN**
EL10830037 4015120830037

Scale drawing



Light distribution

