


DATA SHEET

ALVA UDL TR 50° 900 830 WH

Item number EL10830082
GTIN 4015120830082

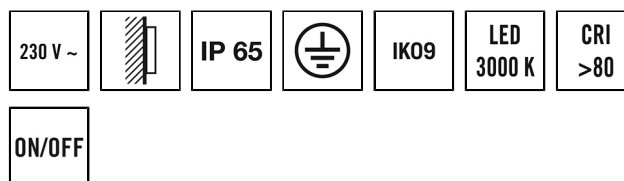

Product description

- LED up/downlight made from high-quality aluminium
- Dirt-repellent thanks to powder coating with lotus effect
- Beam angle: 2 x 50°

Offers special product features like:

- Protected against sea air

Technical data

GENERAL	
Device category	Up-/Downlight
Remote controllable	–
Conformity	CE, EAC, RoHS, WEEE
Warranty	5 years

ATTACHMENT	
Installation type	Surface mounting
Installation position	Wall
Type of connection	Push terminal
Connectable wire cross section	1,50 – 2,50 mm ²

HOUSING	
Dimensions	Length 176 mm x Width 100 mm x Height/Depth 160 mm
Weight	915 g
Material	powder-coated aluminium
Protection type	IP65
Permissible ambient temperature	-25 °C...+40 °C
Impact resistance	IK09
Colour	white, similar to RAL 9016
Glow wire test in accordance with IEC 60695-2-10	650 °C

ELECTRICAL VERSION	
Control system	ON/OFF

Protection class	I
Nominal voltage	230 V AC / 50 Hz
In-rush current	6 A / 369 µs
Leakage current	0,017 mA
Power consumption	70 mA


LIGHT	
Diffuser	transparent
Light emission	direct/indirect
Beam angle	50 °
Flicker factor	<10 %
Rated output P	10 W
Luminous Flux (light)	910 lm
Luminous efficacy	91,00 lm/W
Colour temperature	3000 K
Colour rendering index Ra	> 80
Colour tolerance	SDCM < 3
Color Quality Scale	80
L70B10 lifetime at 25 °C	125000 h
Life time L70B50 at 25 °C	225000 h
Life time L80B10 at 25 °C	80000 h
Life time L80B50 at 25 °C	140000 h
Life time L90B10 at 25 °C	40000 h
Life time L90B50 at 25 °C	70000 h
Energy efficiency class	A++ to A

DATA SHEET

ALVA UDL TR 50° 900 830 WH

Item number **GTIN**
EL10830082 4015120830082

Scale drawing



Light distribution

