


ISABELLE PDL 1200 DDP TR 8800 840 DALI WH

Item number E010306167
GTIN 4015120306167

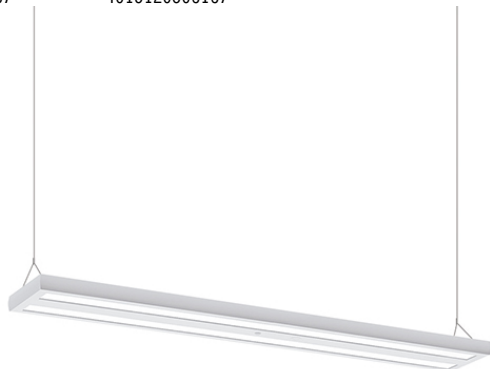

Product description

- LED pendant light, LED output 72 W, for workplace-oriented lighting in offices and meeting rooms with glare-free direct component and indirect light
- Sleek, timeless design
- Ballast (DALI) integrated
- High-quality housing, aluminium lamp bodies, powder-coated white
- Colour temperature 4000 K
- Excellent light quality, no flickering



Technical data

| GENERAL | |
|--|--|
| Device category | Pendant light |
| User interface | DALI-Bus |
| Remote controllable | – |
| Conformity | CE, EAC, RoHS, WEEE |
| Warranty | 5 years |
| ATTACHMENT | |
| Installation type | Pendant |
| Installation position | Ceiling |
| HOUSING | |
| Dimensions | Length 1206 mm x Width 166 mm x Height/Depth 30 mm |
| Weight | 6000 g |
| Material | Aluminium |
| Surface finish | Powder-coated |
| Protection type | IP20 |
| Permissible ambient temperature | 0 °C...+40 °C |
| Relative humidity | 5 - 93 %, non-condensing |
| Colour | white, similar to RAL 9003 |
| Glow wire test in accordance with IEC 60695-2-10 | 650 °C |
| ELECTRICAL VERSION | |
| Control system | DALI |
| Protection class | I |

| Nominal voltage | 220 - 240 V AC / 50 - 60 Hz |
|---------------------------|-----------------------------|
| Stand-by consumption | < 1 W |
| LIGHT | |
| Diffusor | transparent |
| Glare suppression | DDP (micro-prismatic) |
| Light emission | direct/indirect |
| Beam angle | 80 ° |
| Unified Glare Rating | ≤ 19 |
| Flicker factor | < 3 % |
| Rated output P | 78 W |
| Luminous Flux (light) | 8830 lm |
| Luminous efficacy | 113,00 lm/W |
| Colour temperature | 4000 K |
| Colour rendering index Ra | > 80 |
| Colour tolerance | SDCM < 3 |
| Color Quality Scale | CQS > 80 |
| L70B10 lifetime at 25 °C | 70000 h |
| Life time L70B50 at 25 °C | 80000 h |
| Life time L80B10 at 25 °C | 45000 h |
| Life time L80B50 at 25 °C | 50000 h |
| Life time L90B10 at 25 °C | 25000 h |
| Life time L90B50 at 25 °C | 25000 h |
| Photobiological safety | RG1 |
| Energy efficiency class | A++ to A |


ISABELLE PDL 1200 DDP TR 8800 840 DALI WH

Item number **GTIN**
E010306167 4015120306167

Accessories

| Product designation | GTIN |
|----------------------------------|---------------|
| Adapter | |
| ISABELLE PDL CONNECTING PLATE WH | 4015120306242 |

Scale drawing

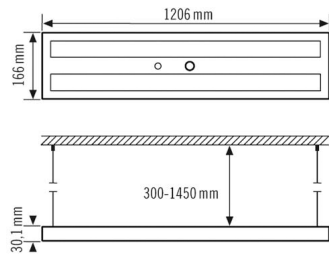

Light distribution