

PD-C 360/8 mini Slave

Item number **GTIN**
 EP10426063 4015120426063



Technical data

GENERAL	
Device category	Ceiling-mounted presence detector
Remote controllable	–
Conformity	CE, EAC, RoHS, WEEE
Product-specific information	Configuration only possible via ESY-Pen, ESY-App and remote control
Warranty	5 years
ATTACHMENT	
Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth: 45 mm, Ø 25 mm
Type of connection	Open end
Length of cable	0,6 m
HOUSING	
Dimensions	Height/Depth 60 mm, Ø 33 mm
Weight	20 g
Material	UV-stabilised PE, UV-stabilised polycarbonate
Protection type	IP55
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	Opal matt
ELECTRICAL VERSION	

Product description

- "Slave" presence detector for extending the field of detection of a "master" presence detector with **360° field of detection** for ceiling mounting
- **Range of up to 8 m** in diameter as a cost efficient system upgrade with up to 10 additional extensions
- "Slave" detector can be connected to the following models:
 - PD-C360i/8 mini / PD-C360i/8 mini-3m / PD-C360i/8 mini DIM
 - PD-C360i/12 mini / PD-C360i/12 mini DIM

Control system	ON/OFF
Protection class	II
Nominal voltage	230 V AC / 50 Hz
Power consumption	0,2 W

SENSORS	
Detection angle	360°
Detection range diagonally	Ø 8 m
Detection range head-on	Ø 5 m
Detection range presence	Ø 3 m
Field of detection	up to 50 m ²
Recommended installation height	3 m
Max. mounting height	5 m
Light measurement	none

CHANNELS (LIGHTING / HVAC)	
Push button input HVAC	–
Slave input	–
Switching delay from "dark to light"	0 s
Switching delay from "light to dark"	30 s
Constant light control	–
Channel	C1 Lighting
Function	Not relevant
Switch contact	Bus system
Push button input	–
Impulse feature	–


PD-C 360/8 mini Slave

Item number	GTIN
EP10426063	4015120426063


Accessories

Product designation	GTIN
Adapter	
COMPACT MINI SPOTLIGHT ADAPTER 51/25	4015120426391
Ceiling-mounted presence detector	
PD-C 360i/8 mini	4015120426025
PD-C 360i/8 mini-3m	4015120427015
PD-C 360i/12 mini	4015120426032

Scale drawing




Field of detections



Detection range

Diagonally (A)	∅ 8 m
Frontal (B)	∅ 5 m
Presence area (C)	∅ 3 m

Circuit diagram

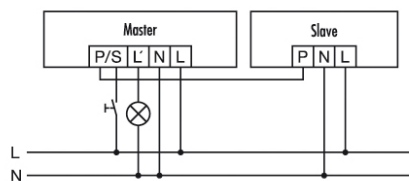

Master/slave connection:

The master device controls connected systems according to the programmed settings.
The sole purpose of the slave devices is to register presence and transmit an impulse to the master device when movement is detected.

Caution: a maximum of 10 slave devices may be connected to one master device.