


ACTUATOR FULL AUTO C3 DALI

Item number **GTIN**
 EP10427473 4015120427473



Technical data

GENERAL	
Device category	Electrical accessories
Conformity	CE, EAC, RoHS, SundaHus, WEEE
Warranty	3-year
ATTACHMENT	
Installation type	Recessed mounting
Installation position	Box
Installation dimension	Installation length: 45 mm x Installation width: 45 mm x Installation depth: 25 mm, Ø 68 mm
Type of connection	Screwed terminal
Connectable wire cross section	1,50 – 2,50 mm ²
HOUSING	

Product description

- Fully automatic or semi-automatic actuator device for channel 3
- Key input for manual control
- Potential-free relay with 10-A switching capacity


Dimensions	Length 45 mm x Width 45 mm x Height/Depth 24 mm
Weight	15 g
Material	UV-stabilised polycarbonate
Protection type	IP20
Permissible ambient temperature	0 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9010

ELECTRICAL VERSION	
Control system	DALI
Protection class	II
Nominal voltage	13 - 22,4 V
Power consumption	0,2 W


ACTUATOR FULL AUTO C3 DALI

Item number **GTIN**
EP10427473 4015120427473

Scale drawing

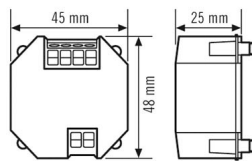

Circuit diagram

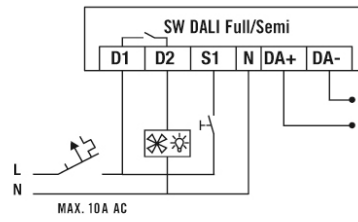

Standard operation