

**FLAT IS **ESY**,**  
**BECAUSE IT REPRESENTS**  
**MAXIMUM PERFORMANCE**  
**WITH SLIM DESIGN**

**FLAT SERIES PRESENCE  
AND MOTION DETECTORS**



# OUTSTANDINGLY FLAT

## 6 MILLIMETRES: ADDED HEIGHT WITH NO COMPROMISE ON EFFICIENCY

With the flat presence and motion detectors from the FLAT series, there is finally something to shout about when it comes to room aesthetics: The housing and lenses have been flattened to achieve a height of just 6 mm when surface-mounted on ceilings for a minimum obtrusive look. The clear lines also fit seamlessly into even the most challenging room architecture. Your planning freedom therefore knows no limits.

If you are searching for a first-class range of designs, you will always find the perfect variety with the ultra-flat FLAT detectors: available in white and black, and in a choice of round or square contours. For use on exposed concrete, the covers are also available in concrete grey\* or, for even greater design freedom, with a high-quality glass surface.\*

\*Available as a separate accessory.



# AUTOMATICALLY EFFICIENT

## EFFICIENT AUTOMATION SAVES COSTS

The FLAT detectors not only save height, they also save costs: because they only use light where someone is actually present, this significantly reduces energy consumption. The one-part detectors also guarantee simple installation and the durable quality makes the automation solution maintenance-free.

## MINIMUM INSTALLATION DEPTH AND MOUNTING HEIGHT

The FLAT presence and motion detectors are ideally suited for indoor use – including close to doors, thanks to the minimum mounting height of 6 mm. The low overall height of the power box results in an installation depth of only 24 mm, leaving enough space for quick and simple wiring.

## POWERFUL DETECTION

Despite its flat lens, the FLAT series also demonstrates high output in detection: Thanks to the passive IR sensor, at an installation height of 2.5 to 3 m, the average range extends over 8 m with a 360° detection angle. This means that a large workspace with a variety of different movement processes can be covered with a single detector. The connection of several detectors in parallel for an even greater range is easy, thanks to the push terminals with through-wiring function, including a master-slave mode. The switch-off delay time can be flexibly and easily adjusted by infrared remote control.

## THREE FIELDS OF DETECTION FOR OPTIMUM ROOM COVERAGE

### Operating area up to 4 m Ø

- High-precision detection of small movements
- Ideal over workplaces

### Head-on passage area up to 6 m Ø

- Field of detection of walking movements
- In all directions
- Ideal for the area between desks

### Diagonal passage up to 8 m Ø


- Detection of walking movements across the detector
- Ideal for the edges of office space



**RADIATION-FREE PIR SENSORS  
WITHOUT ELECTROSMOG**

## ALSO HIGHLY VERSATILE INSTALLATION OPTIONS

The white variant of the round FLAT detector is also available as FLAT LARGE (104 mm Ø) for larger recessed boxes. In combination with the matching ESYLUX surface-mounted box C IP 20, the FLAT LARGE detectors also have an additional installation option.

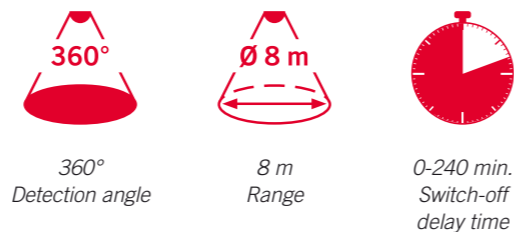

## POWER IN PERFECT HARMONY

The FLAT detectors not only control the lighting, but also show the room aesthetics in the right light – particularly in harmonious interplay with subtle downlights such as the ELSA or STINA models from ESYLUX.



ELSA with round or square housing




STINA available in black or white



PD-FLAT 360i/8 GLASS SQUARED WHITE,  
ELSA 125




PD-FLAT 360i/8 GLASS ROUND BLACK,  
STINA 90

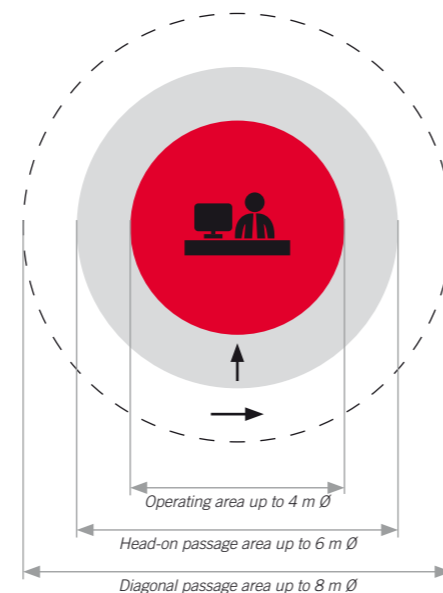

# ALWAYS FLEXIBLE

## DIGITAL ROOM AUTOMATION WITH THE DALI-SWITCH

In combination with the DALI-Switch, the FLAT presence detectors offer the perfect introduction to digital room automation. The individual requirements can be adjusted manually at any time. The DALI-Switch's additional switching channel allows conventional consumers such as ventilation, multimedia devices or air conditioning units to be integrated and controlled, enabling them to automate all the room technology with even lower power consumption. Another advantage of the DALI bus is the simple cabling and wiring – and broadcast operation dispenses with complicated software configuration.

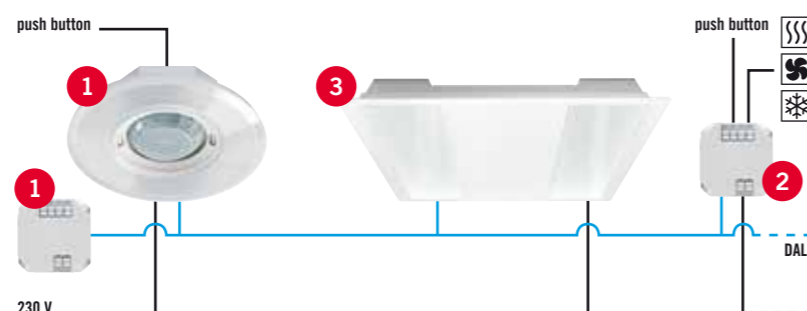

- 1 PD-FLAT-S 360i/8 RW DALI incl. CU PS DALI power supply, item no.: EP10428708
- 2 SW DALI Full Automation, item no.: EP10427473
- 3 ESYLUX ceiling lights, NOVA series

| DALI                      |            |
|---------------------------|------------|
| Product designation       | Item no.   |
| PD-FLAT 360i/8 RW DALI    | EP10427541 |
| PD-FLAT 360i/8 SW DALI    | EP10427558 |
| PD-FLAT 360i/8 RB DALI    | EP10427916 |
| PD-FLAT 360i/8 SB DALI    | EP10427909 |
| PD-FLAT-S 360i/8 RW DALI  | EP10428708 |
| PD-FLAT-S 360i/8 SW DALI  | EP10428715 |
| PD-FLAT-LS 360i/8 RW DALI | EP10428661 |

| 230 V                   |            |
|-------------------------|------------|
| Product designation     | Item no.   |
| MD-FLAT 360i/8 RW       | EP10427886 |
| MD-FLAT 360i/8 SW       | EP10427893 |
| MD-FLAT 360i/8 RB       | EP10428074 |
| MD-FLAT 360i/8 SB       | EP10428081 |
| MD-FLAT-E 360i/8 RW     | EP10428548 |
| MD-FLAT-E 360i/8 RW GST | EP10427862 |
| MD-FLAT-L 360i/8 RW     | EP10428609 |
| PD-FLAT 360i/8 RW       | EP10427930 |
| PD-FLAT 360i/8 SW       | EP10427923 |
| PD-FLAT 360i/8 RB       | EP10427954 |
| PD-FLAT 360i/8 SB       | EP10427947 |
| PD-FLAT-E 360i/8 RW     | EP10428555 |
| PD-FLAT-E 360i/8 RW GST | EP10427879 |
| PD-FLAT-L 360i/8 RW     | EP10428623 |

| KNX                     |            |
|-------------------------|------------|
| Product designation     | Item no.   |
| PD-FLAT 360i/8 RW KNX   | EP10451706 |
| PD-FLAT 360i/8 SW KNX   | EP10451713 |
| PD-FLAT 360i/8 RB KNX   | EP10451768 |
| PD-FLAT 360i/8 SB KNX   | EP10451775 |
| PD-FLAT-L 360i/8 RW KNX | EP10428685 |



### FURTHER ADVANTAGES

- Also available as a set including DALI bus power supply (e.g. PD-FLAT-S 360i/8 RW DALI)
- DALI broadcast for easy commissioning, independent configuration of the electronic ballast
- Field of detection can be extended using master-slave communication
- HVAC systems can be expanded with the ESYLUX DALI-Switch
- Input for conventional switches



The 230 V devices are characterised by their particular durability: Zero-cross switching reliably protects the relay of the detector against high in-rush currents.

### FURTHER ADVANTAGES

- Zero-cross switching for switching behaviour that protects the relay
- Field of detection can be extended using parallel wiring
- Includes push button input
- Also includes PD-FLAT mounting box and pre-assembled GST18i3 inlet and outlet



A night-light feature is integrated into the FLAT KNX detector, which can be simply activated and deactivated using a push button. Seven different colours are available for the night light thanks to the three RGB LEDs installed behind the lens.

### FURTHER ADVANTAGES

- Extensive configuration options from 47 communication objects
- Presence and daylight dependent constant light control
- Detector can be configured as master or slave
- Two orientation levels
- Night-light feature with 7 selectable colours
- Separate presence detector in the KNX system

Photo credits:  
Getty Images: 472098295

**ESYLUX Deutschland GmbH**

An der Strusbek 40  
22926 Ahrensburg | Deutschland  
t: +49 4102 489 0  
f: +49 4102 489 333  
info@esylux.de  
www.esylux.de

**ESYLUX Belgium nv**

Vlamstraat 7 bus 2  
9450 Denderhoutem-Haaltert | België  
t: +32 53 850 570  
f: +32 53 850 579  
info@esylux.be  
www.esylux.be

**ESYLUX Danmark ApS**

Kokholm 3A  
6000 Kolding | Danmark  
t: +45 76 72 90 90  
info@esylux.dk  
www.esylux.dk

**ESYLUX France SARL**

5 rue de Castiglione  
75001 Paris | France  
t: +33 1 5345 10 55  
info@esylux.fr  
www.esylux.fr

**ESYLUX Nederland B.V.**

Leeghwaterstraat 35  
3364 AE Sliedrecht | Nederland  
t: +31 184 647 000  
f: +31 184 647 070  
info@esylux.nl  
www.esylux.nl

**ESYLUX Norge AS**

Strandveien 35  
1366 Lysaker | Norge  
t: +47 2255 52 00  
f: +47 2255 52 01  
info@esylux.no  
www.esylux.no

**ESYLUX Österreich GmbH**

Hafenstraße 2A  
4020 Linz | Österreich  
t: +43 732 788 188 0  
f: +43 732 788 188 7039  
info@esylux.at  
www.esylux.at

**ESYLUX Portugal, Lda.**

Lagoas Park Edifício 8, Piso 1  
2740-244 Porto Salvo | Portugal  
t: +351 214 236 170  
f: +351 214 236 179  
comercial@esylux.pt  
www.esylux.pt

**ESYLUX Russia**

ООО "ИЗИЛЮКС РУ"  
ул. Малая Калужская  
д. 15, стр. 17 | эт. 3, оф. 541  
119071 г. Москва | Россия  
t: +7 495 782 72 40  
info@esylux.ru  
www.esylux.ru

**ESYLUX Suomi Oy**

Äyritie 12 B  
01510 Vantaa | Suomi  
t: +358 20 779 26 60  
info@esylux.fi  
www.esylux.fi

**ESYLUX Sverige AB**

Färögatan 33  
164 51 Kista | Sverige  
t: +46 470 853 00  
f: +46 470 853 53  
info@esylux.se  
www.esylux.se

**ESYLUX Swiss AG**

Steinackerstrasse 29  
Postfach  
8302 Kloten | Schweiz  
t: +41 44 808 61 00  
f: +41 44 808 61 61  
info@esylux.ch  
www.esylux.ch

**ESYLUX Asia Ltd.**

No. 4 32/F Saxon Tower  
7 Cheung Shun Street  
Lai Chi Kok | Kowloon | Hong Kong  
t: +852 3107 89 12  
f: +852 3107 89 99  
sales@esylux.com.hk  
www.esylux.com.hk

**ESYLUX GmbH (Export)**

An der Strusbek 40  
22926 Ahrensburg | Germany  
t: +49 4102 888 80 0  
f: +49 4102 888 80 441  
sales@esylux.com  
www.esylux.com

