

THROUGH WALL FAN KITS - SELV

These fan kits are easy to install and are designed to be ducted straight through an exterior wall. SELV (safety extra low voltage) fans are for use in wet area zones 1, 2 and 3 and incorporate a 12V AC motor and a 12V AC isolating transformer. All kits include a weatherproof cowl. 5 year warranty.


Pro-Series Low Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Fascia	Switching	Model	Order Code
					(l/s)	(m ³ /hr)						
	150	Axial	20	60	101	364	0.19	40	Square	Standard	XPLP150SLV	FAN5894
									Round	Standard	XPLP150CLV	FAN5893
	125	Axial	20	35	36	130	0.56	41	Square	Standard	XPLP125SLV	FAN5887
									Round	Standard	XPLP125CLV	FAN5888
Classic Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Fascia	Switching	Model	Order Code
	150	Axial	20	60	101	364	0.19	40	Square	Standard	XP150LV	FAN5895
	125	Axial	20	35	36	130	0.56	41	Square	Standard	XP125LV	FAN5889
	100	Axial	20	20	23	85	0.87	41	Square	Standard	XP100LV	FAN5882

Note: Installed system performance is always influenced by duct length and layout

Switching Options

Standard Remote switch (not supplied).


Accessories

Fascia	Model	Duct	Round			Square		
			White	Satin Silver	Chrome	White	Satin Silver	Chrome
	XPLP	150mm	FAN0750	FAN2070	FAN0613	FAN0749	FAN2071	FAN0598
		125mm	FAN0748	FAN2069	FAN0757	FAN0747	FAN2068	FAN0755

THROUGH WALL FAN KITS - SELV

Dimensions (mm)

Model	Cut-Out Size	A	B	C	D	E	F	G	H
XPLP150	173	174	30	150	375	150	132	10	191
XPLP125	140	160	30	125	375	118	128	10	161
XP150	160	174	30	150	375	148	74	27	200
XP125	140	160	30	125	375	118	74	27	168
XP100	112	138	30	100	375	98	74	27	155

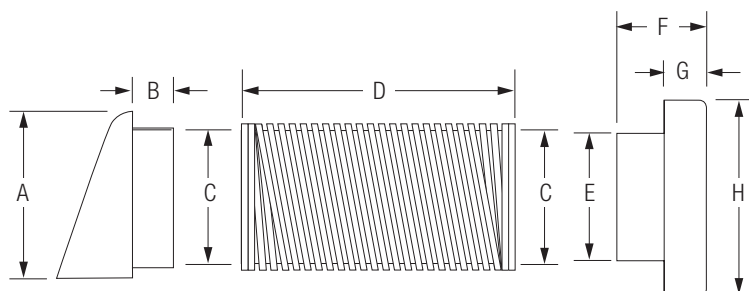

Technical

Supply	12V DC
Max. Operating Temp	50°C
IP Rating	IPX4
Exterior Grille	Weatherproof Cowl
Duct	Aluminium Semi-Rigid
Duct Length	375mm