


# THROUGH WALL FAN KITS - Auto Shutter

These fan kits are easy to install and are designed to be ducted straight through an exterior wall. Auto shutter models have automated backflow prevention vanes. 150mm kits include a weatherproof cowl. 5 year warranty.

Classic Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Fascia	Switching	Model	Order Code
					(l/s)	(m <sup>3</sup> /hr)						
	300	Axial	82	60	306	1100	0.27	60	Square	Standard	XPS300A	FAN2043
	230	Axial	45	50	152	550	0.30	50	Square	Standard	XPS230A	FAN0348
										Standard	XP150A	FAN0136
	150	Axial	25	60	87	313	0.29	40	Square	Pull Cord	XP150AP	FAN0137
Timer										XP150AT	FAN0138	

**Note:** Installed system performance is always influenced by duct length and layout

## Switching Options

**Standard** Remote switch (not supplied).


**Timer** Remote switch (not supplied). Fan continues operating for preset time after switching off. 150mm models include fixed 7 minute timer. 125mm and 100mm model timers are 1-20 minute adjustable and require permanent and switched phase.

**Pull Cord** Integral part of fan.


# THROUGH WALL FAN KITS - Auto Shutter

## Dimensions (mm)

Model	Cut-Out Size	A	B	C	D	E	F	G	H
<b>XPLP150</b>	173	174	30	150	375	150	132	10	191
<b>XPLP125</b>	140	160	30	125	375	118	128	10	161
<b>XP150</b>	160	174	30	150	375	148	74	27	200
<b>XP150A</b>	160	174	30	150	375	148	90	55	200
<b>XP125</b>	140	160	30	125	375	118	74	27	168
<b>XP100</b>	112	138	30	100	375	98	74	27	155

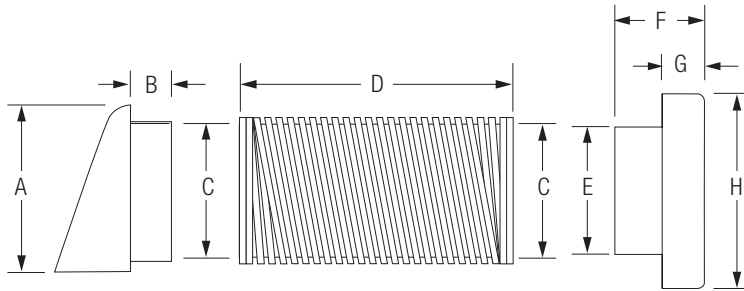

*XP*

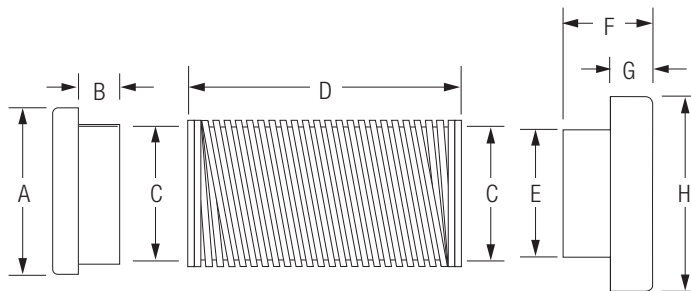

*XPS*

## Technical

Model	XPS	XP
<b>Supply</b>	220-240V AC, 50Hz	
<b>Max. Operating Temp</b>	50°C	50°C
<b>IP Rating</b>	IPX4	IPX4
<b>Exterior Grille</b>	White Fixed Grille	Weatherproof Cowl
<b>Duct</b>	Aluminium Semi-Rigid	Aluminium Semi-Rigid
<b>Duct Length</b>	375mm	375mm