

**MANROSE®**

# HYPER150


BATHROOM FAN RANGE

NEW ZEALAND'S

# NO.1

bathroom fan leads the way with

**improved energy efficient EC motor technology**



**NEW  
UPDATED**

**EC MOTOR TECHNOLOGY**

Updated EC motor technology  
Environmentally friendly with at least  
33% less energy used at just 18W

Long life with lower operating  
temperature brushless technology

High duty-point performance

Reliability enhanced

# MANROSE®



# HYPER150 BATHROOM FAN RANGE

## EC Axial Inline Fans and Fan Kits

The new Manrose Hyper150 EC axial inline fans and fan kits operate at just 18W which means a specific fan power of only 0.17 W/l/s.



### Inline Extraction Fans

HYPER150 EC	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound db(A)	Switching	Product Code
					(l/s)	(m³/hr)				
	150	EC Axial	18	91	105	380	0.17	38	Standard	FAN0085
	150	EC Axial	18	91	105	380	0.17	38	Variable Speed Controller**	FAN7000*


\* All data for FAN7000 at full speed

\*\* Euro flush-box for variable speed control switch – included


### Inline Extraction Fan Kits - Hyper150 EC Fan & Contour Fascias

Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Fascia	Exterior Grille	Switching	Product Code
					(l/s)	(m³/hr)					
	150	EC Axial	18	91	105	380	0.17	Range Selection	Fixed Louvre White	Standard	FAN7044
	<b>Round Fascia</b>				<b>Square Fascia</b>						
	<b>White</b>	<b>Black</b>	<b>LED White</b>	<b>LED Black</b>	<b>White</b>	<b>Black</b>	<b>LED White</b>	<b>LED Black</b>			
											
	DCT4502	DCT4503	DCT4506	DCT4507	DCT4504	DCT4505	DCT4508	DCT4509			

### Performance Curve

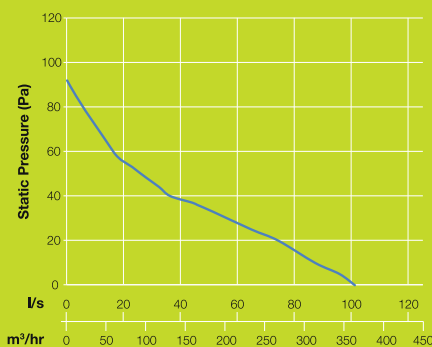

### Dimensions (mm)

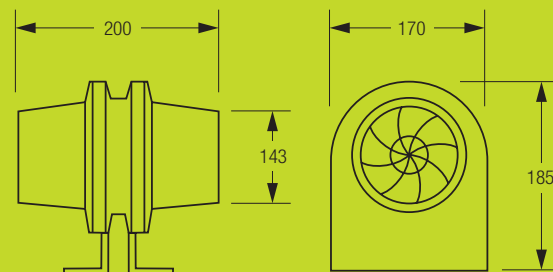

### Fan Timer Selection



The FAN2444 fan timer model shown must be used for all Manrose Hyper150 EC axial inline fans and fan kits. Timer has fully adjustable 0 sec to 5 min delay start and fully adjustable run-on-time after switching off of 0 sec to 20 min. This fan timer model can also be used with AC fans.

Old model FAN2444 (with resistor) and FAN0372 fan timers are only suitable for use with AC fans and must not be used with EC fans.




## EC Axial Inline Fans and Fan Kits


### Inline Extraction Fan Kits without Lights

Pro-Series Low Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Interior Grille	Exterior Grille	Switching	Product Code
					(l/s)	(m³/hr)					
	150	EC Axial	18	91	105	380	0.17	Round White and Square White	Weatherproof Cowl White and Fixed Louvre White	Standard	FAN0618
										Timer	FAN0619
Classic Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Interior Grille	Exterior Grille	Switching	Product Code
					(l/s)	(m³/hr)					
	150	EC Axial	18	91	105	380	0.17	Round White	Fixed Louvre White	Standard	FAN0101
										Timer	FAN0102

### Inline Extraction Fan Kits with LED Lights

Classic Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Interior Grille	Exterior Grille	Switching	Product Code
					(l/s)	(m³/hr)					
	150	EC Axial	18	91	105	380	0.17	Round White	Eggcrate White	Standard	FAN5369
										Timer	FAN5370

### Inline Extraction Fan Kits with Halogen Lamps

Classic Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Interior Grille	Exterior Grille	Switching	Product Code
					(l/s)	(m³/hr)					
	150	Axial	18	91	105	380	0.17	Round White	Eggcrate White	Standard	FAN0803
										Timer	FAN0804

#### Switching Options

**Standard** Remote switch (not supplied).

**Timer** Remote switch (not supplied). Timer has fully adjustable 0 sec to 5 min delay start and fully adjustable run-on time after switching off of 0 sec to 20 min.



### Fan Selection for Bathroom Applications

Hyper150 EC axial inline fan kits are designed to meet New Zealand Building Code G4/AS1 and are suitable for bathrooms with less complex duct runs.

The following chart provides a quick reference guide for Hyper150 EC axial inline fan kits as being the right choice based on good ducting system selection and installation best practices being employed. Installation details in the Instruction Manual must be followed. Compliance with the building code remains the responsibility of the installer as it is dependant on how the duct and accessories are installed.

#### Bathroom

25 l/s

Metres of Ducting

No. of Bends

	1	2	3	4	5	6	7	8	9	10
1	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange
2	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange
3	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange
4	Orange	Orange	Orange	Orange	Orange	Orange	Grey	Grey	Grey	Grey
5	Grey	Grey	Grey	Grey	Grey	Grey	Grey	Grey	Grey	Grey

 FAN0085 - Hyper150 EC Axial Fan and FAN7000 at full speed



*For longer duct runs, or more bends, refer to the Simx website [www.simx.co.nz](http://www.simx.co.nz) for information on more powerful fans such as the 150mm MixFlo and Blue Jet mixed flow fans.*



**E6337** Complies with AS/NZS Standards  
Specifications are subject to change without notice.