
INSTALLATION INSTRUCTIONS

MANROSE

Manrose Weatherproof Cowls

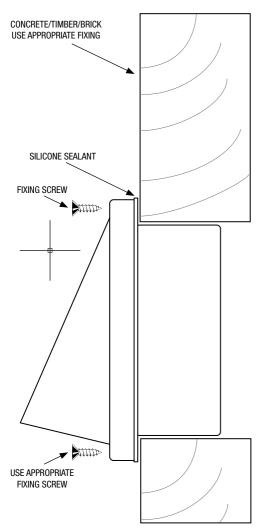

Applies to the following products:

DCT1031	DCT4400	DCT3618
DCT4316	DCT4323	DCT4350
DCT4261	DCT0019	
DCT4299	DCT4572	
DCT1995	DCT3611	
DCT1030	DCT3614	
DCT4399	DCT3615	
DCT4324	DCT3616	
DCT0018	DCT3617	

- 1. This weatherproof cowl is supplied complete with perimeter frame and four fixing screws.
- 2. Ensure that the supplied fixing screws are suitable for the application and for the substrate that the cowl is being affixed to. Alternative fixings should be manufactured from stainless steel.
- 3. The external frame surrounding the cowl must be waterproof with a suitable silicone sealant to ensure weathertightness.
- 4. Once all four corners to the substrate are fixed using the supplied screws or suitable alternative fixings and the appropriate silicone sealant has been applied around all 4 sides of the perimeter frame a visual inspection must be made to confirm weathertightness.

Due to the many building variables and different available cladding systems, we recommend that this product be installed by a licensed building practitioner. The information contained herein should be used strictly as a guideline only.

🗘 Simx

Installation Instructions sales@simx.co.nz | www.manrose.co.nz