


Manrose Fixed Louvre Grilles

CONCRETE/TIMBER/BRICK
USE APPROPRIATE FIXING

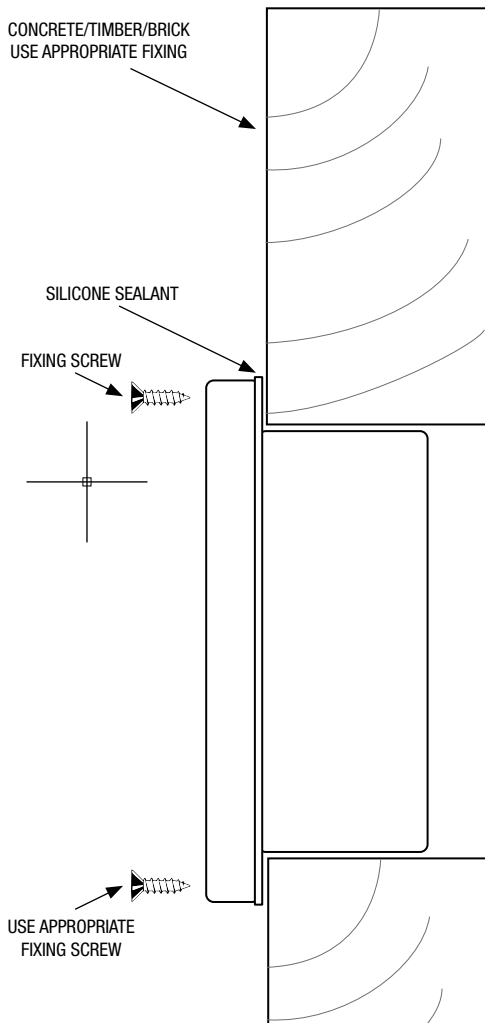

Applies to the following products:

DCT0024	DCT4319	DCT2200
DCT0025	DCT4360	DCT2201
DCT0040	DCT4373	DCT2202
DCT0041	DCT4428	
DCT0062	DCT4429	
DCT0063	DCT4430	
DCT0073	DCT4431	
DCT0340		
DCT1979		

1. This fixed louvre grille is supplied complete with perimeter frame and four fixing screws.
2. Ensure that the supplied fixing screws are suitable for the application and for the substrate that the grille is being affixed to. Alternative fixings should be manufactured from stainless steel.
3. The external frame surrounding the grille must be waterproof with a suitable silicone sealant to ensure weathertightness.
4. Once all four corners to the substrate are fixed using the supplied screws or suitable alternative fixings and the appropriate silicone sealant has been applied around all 4 sides of the perimeter frame a visual inspection must be made to confirm weathertightness.

Due to the many building variables and different available cladding systems, we recommend that this product be installed by a licensed building practitioner. The information contained herein should be used strictly as a guideline only.