

Allows Continuous Extract with Manual Switch to Boost













A fresh air solution for quiet, continuous air circulation. Energy efficient exhaust featuring 24/7 continuous, timed, or standard settings allowing for enhanced air quality and a healthier home.

- Energy efficient DC motor for quiet operation
- Selectable 24/7 continuous trickle ventilation,10 minute run on timer, or standard on/off operation
- Continuous setting for well-sealed new homes
- EDGE150 model designed for NZBC G4 AS1
- Maintains fresh and healthy air circulation



EDGEDC150

Designed for G4 Bathrooms at 24/7 continuous and/or intermittent boost rates when mounted in through-wall application




EDGEDC100

SELECTABLE SWITCH



Standard

Simply turn on or off as required.





10 Minute Run On Timer

Continues to operate for 10 minutes after switching off.





Edge DC

PREMIUM WALL FAN
















AIRFLOW PRESSURE

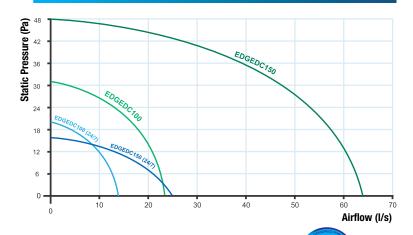


EXHAUST Model EDGEDC100 EDGEDC150 **Motor Type** DC DC Rated 220-240V~ 50Hz 220-240V~ 50Hz Voltage **IP Rating** IPX4 IPX4 **Ball Bearing** Yes Yes **Backdraft** Yes Yes Stopper **Cutout Size** 103mm 153mm **Duct Size** Ø100mm Ø150mm Min. Install 123mm 139mm **Depth** 24/7 **Standard** 24/7 **Standard** Free Air 24 l/s 25 l/s 14 l/s 64 l/s **Delivery** Motor 2 Watts 7 Watts 2 Watts 14 Watts Power

38dB(A)

24dB(A)


40dB(A)

DIMENSIONS (mm)



	Α	В	С	D	E
EDGEDC100	109	25	100	130	150
EDGEDC150	119	34	148	180	210

WIRING DIAGRAM FOR 24/7 CONTINUOUS

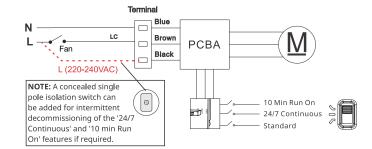

COMPONENTS:

1 x Wall Fan

Noise Level

(at 3 metres)

- 1 x Instruction Manual
- 1 x Warranty card

Installation: Electrician required*

30dB(A)

3 Years Warranty:



1 Haliday Place, East Tamaki Auckland, 2013

T: +64 (9) 259 1660 E: sales@simx.co.nz