

ELSA-2 DL 225 OP 110° 1800 840 PD IR DALI WH

Item number E010299674
GTIN 4015120299674



Technical data

GENERAL	
Device category	Downlight
Product information	Do not cover the downlight directly with insulating material.
User interface	IR remote control, DALI-Bus
Remote controllable	✓
Conformity	CE, EAC, RoHS, WEEE
Warranty	5 years

ATTACHMENT	
Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth: 70 mm, Ø 225 mm
Type of connection	Push terminal
Connectable wire cross section	0.5 - 2.5 mm ²
Number of contacts	5

HOUSING	
Dimensions	Height 60 mm, Ø 240 mm
Weight	1270 g
Material	powder-coated aluminium
Protection type	IP20
Permissible ambient temperature	-20 °C...+40 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9003
Glow wire test in accordance with IEC 60695-2-10	650 °C

ELECTRICAL VERSION	
Control system	DALI
Protection class	I

DALI	220 - 240 V ~/~	LED 4000 K	CRI 80	Phi 1850 lm	97 lm/W	UGR ≤ 25
IP20		Ø 6 m				

Product description

- LED downlight, 4000K with opal cover (diffuser), 18W, for ceiling mounting without additional accessories
- High light quality and system performance
- Operating device DALI, included
- Integrated FLAT MINI DALI presence detector with 360°
- field of detection
- Range of up to 6 m in diameter at a recommended installation height of 2.5 m (maximum installation height 3 m) for use in small rooms and passageways with no or little natural lighting
- An external DALI power supply is required for operation
- Ideal for use as slave lights to supplement the ELSA-2 DL 225 OP 110° 1800 840 PD PS DALI WH

Offers special product features like:

- Integrated presence detector

Nominal voltage	220 - 240 V AC/DC / 50 - 60 Hz
Stand-by consumption	< 0.5 W

LIGHT	
Diffuser	opal
Light emission	direct
Beam angle	110 °
Unified Glare Rating	≤ 25
Flicker factor	0 %
Rated output P	19 W
Luminous flux - min	1850 lm
Luminous flux - max	1850 lm
Luminous efficacy - min	97 lm/w
Luminous efficacy - max	97 lm/w
Colour temperature	4000 K
Colour rendering index Ra	> 80
Colour tolerance	2 SDCM
Color Quality Scale	>80
L70B10 lifetime at 25 °C	60000 h
Life time L70B50 at 25 °C	60000 h
Life time L80B10 at 25 °C	40000 h
Life time L80B50 at 25 °C *	40000 h
Life time L90B10 at 25 °C	20000 h
Life time L90B50 at 25 °C	20000 h
Photobiological safety	RG0

SENSORS	
Detection angle	360°
Detection range diagonally	Ø 6 m

ELSA-2 DL 225 OP 110° 1800 840 PD IR DALI WH

Item number	GTIN
EO10299674	4015120299674

Detection range head-on	Ø 3 m
Detection range presence	Ø 2.5 m
Field of detection	28 m ²
Range adjustment	mechanically with included cut to size lens mask
Recommended installation height	2.5 m
Max. mounting height	3 m
Light measurement	mixed light
Level of brightness	100 - 1000 lx

Push button input HVAC	-
Channel	C1 Lighting
Function	Switching, Dimming
Switch contact	Bus system
Push button input	-
Impulse mode	-
Switch-off delay time	60 s...240 min (adjustable in steps)
Orientation light	10 - 40 % luminous efficiency
Switch-off delay time, orientation light	60 s...240 min


CHANNELS (LIGHTING / HVAC)

Number of light channels	1
--------------------------	---


Accessories

Product designation	Item number	Product description	GTIN
Adapter			
ELSA-2 RING 225	EO10300264	Adapter ring 225-265 mm for ELSA-2 series	4015120300264
Electrical accessories			
JUNCTION BOX 5-POLE BK	EO10430992	Universal junction box, black, 5-pin, 2.5 mm ²	4015120430992
POWER SUPPLY 200mA DALI	EC10430008	200mA power pack for supplying power to DALI operating units or DALI control modules that do not have their own power supply	4015120430008
Mounting			
ELSA-2 MOUNTING FRAME 225 SM WH	EO10300899	Ceiling installation frame for ELSA-2 225 series	4015120300899
Remote control			
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	4015120425356
REMOTE CONTROL PDi DALI	EP10425899	IR remote control for DALI presence detectors and motion detectors	4015120425899

Dimension drawing



Lichtverteilung

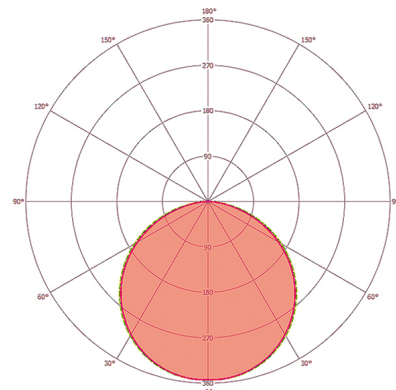

ELSA-2 DL 225 OP 110° 1800 840 PD IR DALI WH

Item number **GTIN**
 EO10299674 4015120299674

Field of detections	Detection range	Circuit diagram
	<ul style="list-style-type: none"> Diagonally (A) Ø 6 m 	
	<ul style="list-style-type: none"> Frontal (B) Ø 3 m 	
	<ul style="list-style-type: none"> Presence area (C) Ø 2.5 m 	

Standard operation.

Detailed product description

- LED downlight, 18 W for ceiling mounting
- Recessed luminaire with opal cover (diffuser)
- High-quality housing, aluminium lamp body, white powder-coated (RAL 9003)
- Can be used for ceiling mounting without additional accessories
- Colour temperature: 4000 K with the lowest colour tolerances
- Luminous flux: 1750 lm
- Rated life time L80B50 at 25 °C: 40000 h
- Operating device: on/off (included)
- Integrated FLAT MINI DALI presence detector with 360° field of detection
- Range of up to 6 m in diameter at a recommended installation height of 2.5 m
- Automatic light control of DALI electronic ballasts to achieve a constant brightness level, depending on presence and natural light (with DALI-output)
- Default settings ensure immediate operability
- Simple programming using remote control. Detector can be used as a fully automatic or semi-automatic device
- Lowering of the luminous efficiency after expiration of the time setting for use as an orientation light for hallways and passageways
- An external DALI power supply is required for operation
- Ideal for use as slave lights to supplement the ELSA-2 DL 225 OP 110° 1800 840 PD PS DALI WH