


PD-C 360i/12 mini KNX

Item number **GTIN**
 EP10426162 4015120426162

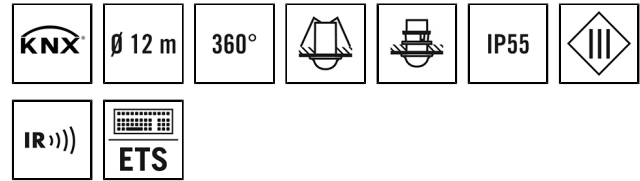

Product description

- **KNX Mini** presence detector with **360° field of detection** for recessed ceiling mounting.
- **range of up to 12 m** in the diameter at a recommended installation height of 3 m
- For use in KNX (EIB), TP (twisted pair) bus system in conjunction with other KNX components
- Parameter and function settings via ETS (Engineering Tool Software)

Offers special product features like:

- Presence and daylight dependent constant light control
- KNX functions: Alarm, twilight switch, brightness detection, light-dependent motion detection, snooze function, scene telegram via object



Technical data

GENERAL	
Device category	Ceiling-mounted presence detector
User interface	IR remote control, ETS-Software
Remote controllable	✓
Conformity	CE, EAC, RoHS, SundaHus, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth: 45 mm, Ø 25 mm
Type of connection	Plug, Socket
Connector	WIELAND BST14i2F S1 ZR1 S MGN01, WIELAND BST14i2F B1 ZR1 S MGN01
Length of cable	1 m
HOUSING	
Dimensions	Height/Depth 70 mm, Ø 58 mm
Weight	35 g
Material	UV-stabilised polycarbonate
Protection type	IP55
Permissible ambient temperature	5 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	Opal matt
ELECTRICAL VERSION	
Control system	KNX
Protection class	III
Nominal voltage	29 - 31 V DC

Power consumption	0.2 W
Power consumption	6 mA

SENSORS	
Detection angle	360°
Detection range diagonally	Ø 12 m
Detection range head-on	Ø 6 m
Detection range presence	Ø 4 m
Field of detection	up to 113 m ²
Recommended installation height	3 m
Max. mounting height	5 m
Light measurement	mixed light
Level of brightness	5 – 2000 lx

CHANNELS (LIGHTING / HVAC)	
Number of light channels	2
Number of HVAC-channels	1
Push button input lighting	1
Push button input HVAC	–
Slave input	✓
Mode	Semi-automatic, Fully automatic
Switching delay from "dark to light"	300 s
Switching delay from "light to dark"	30 s
Constant light control	✓
Sensitivity configurable	✓
KNX input	manual light control, block objects, reset, slave
KNX output	presence, status, light value, HVAC
KNX functions	Presence simulation, Manual override, Master- / slave-toiminto, Night-light feature,

PD-C 360i/12 mini KNX

Item number	GTIN
EP10426162	4015120426162

	Sensitivity configurable, Sends a telegram at regular intervals
Channel	C1 Lighting
Function	Switching, Regulate
Switch contact	Bus system
Push button input	–
Impulse mode	–
Switch-off delay time	30 s...720 min (adjustable in steps)
Orientation light	disabled/10 - 50 %, 2 values can be selected
Channel	C2 Lighting
Function	Switching, Regulate

Offset setting	c2 offset from c1 (-80 % to +80 %)
Push button input	–
Switch-off delay time	10 s...60 min (adjustable in steps)
Orientation light	disabled/10 - 50 %, 2 values can be selected
Switch-off delay time, orientation light	60 s...250 min
Channel	C3 HVAC
Function	Switching
Push button input	–
Switch-on delay	120 s...30 min
Switch-off delay time	10 s...720 min (adjustable in steps)

Factory settings

GENERAL	
Sensitivity	100 %
Orientation light ON	–
Orientation light, depending on brightness	✓
Deviation (%)	0 %

Luminous efficiency switch-on value	60 %
-------------------------------------	------

CHANNELS (LIGHTING / HVAC)	
Channel	C1 Lighting
Operating mode	fully automatic
Level of brightness/switching threshold	500 lx
Switch-off delay time	5 min

Accessories


Product designation	Item number	Product description	GTIN
Adapter			
COMPACT MINI SPOTLIGHT ADAPTER 51/25	EP10426391	Adapter for COMPACT MINI (8 m and 12 m) series for installing motion and presence detectors in spotlights (illuminant size QR-CBC51-Ø 51 mm) with retaining ring	4015120426391
Remote control			
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	4015120425356
REMOTE CONTROL PDi/USER	EM10425547	IR remote control for end users of presence detectors	4015120425547
TELESCOPE MAGNET	EC10430022	Telescope magnet	4015120430022

DATA SHEET


PD-C 360i/12 mini KNX

Item number **GTIN**
EP10426162 4015120426162

Dimension drawing




Field of detections



Detection range

■ Diagonally (A)	Ø 12 m
■ Frontal (B)	Ø 6 m
■ Presence area (C)	Ø 4 m

Circuit diagram

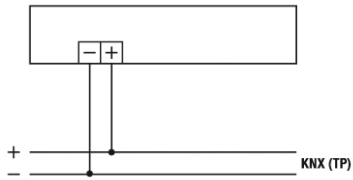

Standard operation