

PD-C 360i/24 FM DUO DALI

Item number

EP10428791

GTIN

4015120428791



Technical data

GENERAL

Device category	Ceiling-mounted presence detector
Included in delivery	includes lens mask
User interface	IR remote control with "blue mode" technology
Remote controllable	✓
Conformity	CE, EAC, RoHS, WEEE
Warranty	5 years

ATTACHMENT

Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth: 90 mm, Ø 68 mm
Type of connection	Push terminal
Connectable wire cross section	1.5 - 2.5 mm ²

HOUSING

Dimensions	Height 108 mm, Ø 108 mm
Weight	166 g
Material	UV-stabilised polycarbonate
Protection type	IP20
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9010

ELECTRICAL VERSION

Control system	DALI
Protection class	II
Nominal voltage	230 V ~ / 50 Hz
Output current	100 mA

Ø 24 m	360°	DALI	IP20	2 CH	2 CH	
--------	------	------	------	------	------	--

Product description

- Presence detector with **360° field of detection** for ceiling mounting
- **range of up to 24 m** in the diameter at a recommended installation height of 3 m
- Automatic light control by DALI or DSI electronic ballasts to a constant brightness level, depending on presence and natural light (with DALI/DSI output)

Offers special product features like:

- Presence and daylight dependent constant light control
- Simple parameterisation, remote control and documentation with ESY-Pen and ESY-App
- Broadcast control of DALI and DALI-2 control gear

Power consumption	0.6 W
-------------------	-------

SENSORS

Detection angle	360°
Detection range diagonally	Ø 24 m
Detection range head-on	Ø 11 m
Detection range presence	Ø 8 m
Field of detection	up to 453 m ²
Recommended installation height	3 m
Max. mounting height	5 m
Light measurement	mixed light
Level of brightness	100 - 2000 lx

CHANNELS (LIGHTING / HVAC)

Number of light channels	2
Number of HVAC-channels	2
Push button input lighting	2
Push button input HVAC	-
Slave input	✓
Mode	Semi-automatic, Fully automatic
Switching delay from "dark to light"	300 s
Switching delay from "light to dark"	30 s
Constant light control	✓
Sensitivity configurable	✓
Channel	C1 Lighting
Function	Switching, Regulate, Dimming, Broadcast
Switch contact	Bus system, 50 mA, max. 25 driver
Push button input	✓
Impulse mode	-

PD-C 360i/24 FM DUO DALI

Item number	GTIN
EP10428791	4015120428791

Switch-off delay time	60 s...240 min (adjustable in steps)
Orientation light	10 – 50 % luminous efficiency
Switch-off delay time, orientation light	60 s...240 min
Channel	C2 Lighting
Function	Switching, Regulate, Dimming, Broadcast
Switch contact	Bus system, 50 mA, max. 25 driver
Push button input	✓
Switch-off delay time	60 s...240 min (adjustable in steps)
Orientation light	10 – 50 % luminous efficiency
Switch-off delay time, orientation light	60 s...240 min
Channel	C3 with accessory (ACTUATOR FULL AUTO C3 DALI)

Function	Switching
Switching capacity	10 A (12 V DC / 230 V AC)
Switch contact	make contact / floating
Push button input	✓
Switch-off delay time	60 s...120 min (adjustable in steps)
Channel	C4 with accessory (ACTUATOR SEMI AUTO C4 DALI)
Function	Switching
Switching capacity	10 A (12 V DC / 230 V AC)
Switch contact	make contact / floating
Push button input	✓
Switch-off delay time	60 s...120 min (adjustable in steps)

Factory settings

GENERAL	
Sensitivity	100 %
Afterglow luminous efficiency	10 %
Afterglow duration	1 min
Orientation light ON	-
Orientation light, depending on brightness	✓
Switching threshold for orientation light	500 lx
Deviation (%)	0 %
Luminous efficiency switch-on value	10 %

Operating mode	fully automatic
Level of brightness/switching threshold	500 lx
Switch-off delay time	5 min
Luminous efficiency of orientation light	10 %
Duration of switch-off warning	300 s
Channel	C2 Lighting
Operating mode	Semi-automatic
Level of brightness/switching threshold	500 lx
Switch-off delay time	5 min
Luminous efficiency of orientation light	10 %
Duration of switch-off warning	300 s

CHANNELS (LIGHTING / HVAC)

Channel	C1 Lighting
---------	--------------------

Accessories



Product designation	Item number	Product description	GTIN
Ceiling-mounted presence detector			
PD-C 360/8 Slave	EP10055379	Slave presence detector for extending the field of detection of a Master presence detector	4015120055379
PD-C 360/24 Slave	EP10055386	Slave presence detector for extending the field of detection of a Master presence detector	4015120055386
PD-C 360/32 Slave	EP10427770	Slave presence detector for extending the field of detection of a Master presence detector	4015120427770
Cover			
COMPACT COVER SET 24/32 SR	EP10425431	Cover set for COMPACT series, 24 m/32 m, consists of cover and design ring, silver	4015120425431
COMPACT COVER SET 24/32 BK	EP00007491	Cover set for COMPACT series, 24 m/32 m, consists of cover and design ring, black	4015120007491
Electrical accessories			
ACTUATOR FULL AUTO C3 DALI	EP10427473	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (fully automatic)	4015120427473
ACTUATOR SEMI AUTO C4 DALI	EP10427480	Modul for the conversion of bus commands from the DALI presence detector and other light controls into switching signals (semi-automatic)	4015120427480
Protection			
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø 180 mm, height 90 mm	4015120425608

PD-C 360i/24 FM DUO DALI

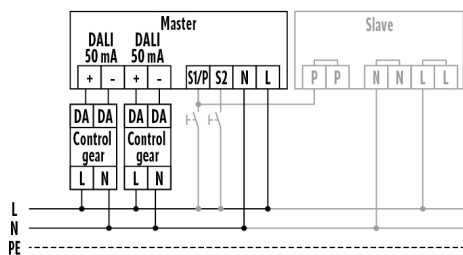
Item number	GTIN
EP10428791	4015120428791

Accessories

Product designation	Item number	Product description	GTIN
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presense and motion detectors and smoke detectors, Ø 165 mm, height 70 mm	4015120425615
Remote control			
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	4015120425356
REMOTE CONTROL PDi DALI	EP10425899	IR remote control for DALI presense detectors and motion detectors	4015120425899
REMOTE CONTROL PDi/USER	EM10425547	IR remote control for end users of presense detectors	4015120425547

Dimension drawing	Field of detections	Detection range	
		Diagonally (A)	Ø 24 m
		Frontal (B)	Ø 11 m
		Presence area (C)	Ø 8 m

Circuit diagram



Standard operation with optional control via a closing button and use of max. ten slave devices to one master device.

PD-C 360i/24 FM DUO DALI

Item number

EP10428791

GTIN

4015120428791

Detailed product description

- Presence detector with **360° field of detection** for ceiling mounting
- **range of up to 24 m** in the diameter at a recommended installation height of 3 m
- Automatic light control by DALI or DSI electronic ballasts to a constant brightness level, depending on presence and natural light (with DALI/DSI output)
- Default settings ensure immediate operability
- Simple programming using remote control with "blue mode" technology
- Remote control can be deactivated (sabotage protection)
- Additional switch input per channel
- Detector can be used as a fully automatic or semi-automatic device
- Lowering of the luminous efficiency after expiration of the time setting for use as an orientation light for hallways and passageways, adjustable between 10 - 50%
- Integrated switch-off warning
- Easily replaceable/paintable cover and design ring (available in "silver" as an accessory)
- Field of detection can be extended by connecting slave devices
- Targeted masking out of areas by means of an enclosed lens mask