

INLINE EXTRACTION FAN KITS with Halogen Lamp

These high efficiency inline fans are designed to provide higher levels of extraction for larger bathrooms and the halogen lamp adds light directly above your steam source (e.g. shower or bath). Mixed flow fans provide users with a two fan speed option. 5 year warranty.

Pro-Series Low Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (PA)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Interior Grille	Exterior Grille	Switching	Model	Order Code
					(l/s)	(m ³ /hr)						
	150	Axial	18	91	105	380	0.17	Round White	Round White	Standard	ELLP150RWS	FAN2033
										Timer	ELLP150RWT	FAN2035
								Round Silver	Round White	Standard	ELLP150RSS	FAN2034
										Timer	ELLP150RST	FAN2036
	125	Mixed Flow	40 26	220 160	89 72	320 260	0.45 0.36	Round White	Round White	Standard	ELLP125RWS	FAN2029
										Timer	ELLP125RWT	FAN2031
Round Silver	Round White	Standard	ELLP125RSS	FAN2030								
		Timer	ELLP125RST	FAN2032								
Classic Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Interior Grille	Exterior Grille	Switching	Model	Order Code
					(l/s)	(m ³ /hr)						
	150	Axial	18	91	105	380	0.17	Round White	Eggcrate White	Standard	EL150S	FAN0803
										Timer	EL150T	FAN0804
	125	Axial	20	35	36	130	0.56	Round White	Eggcrate White	Standard	EL125S	FAN2037
										Timer	EL125T	FAN2038
	100	Axial	20	120	31	110	0.65	Round White	Eggcrate White	Standard	EL100S	FAN0420
										Timer	EL100T	FAN0438



Note: Installed system performance is always influenced by duct length and layout

Switching Options

Standard Remote switch (not supplied).

Timer Remote switch (not supplied). Fan continues operating for preset time after switching off. 150mm models include fixed 7 minute timer. 125mm and 100mm model timers are 1-20 minute adjustable and require permanent and switched phase.


Accessories

Diffuser with Halogen Lamp (12V 50W)	Model	White	Satin Silver	Chrome
			ELLP150	DCT1521
	ELLP125	DCT1519	DCT1520	-
	EL150	DCT1169	-	DCT1171
	EL125	DCT2121	-	DCT2120
	EL100	DCT0360	-	DCT0362

INLINE EXTRACTION FAN KITS with Halogen Lamp


Dimensions (mm)

Model	Diffuser Cut-Out	A	B	C	D	E	F	G	H
ELLP150	165	200	143	170	185	-	200	80	148
ELLP125	140	182	122	350	60	168	100	100	-
EL150	165	200	143	170	185	200	200	74	148
EL125	145	125	155	125	195	155	170	74	118
EL100	115	130	155	90	100	27	140	74	98


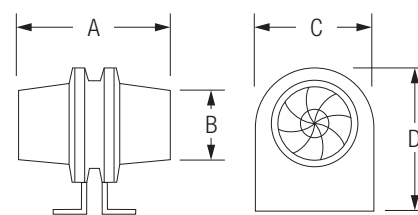


ELLP150 / EL150


Note: Diffuser cut-out size is a nominal diameter for a circular cut-out.

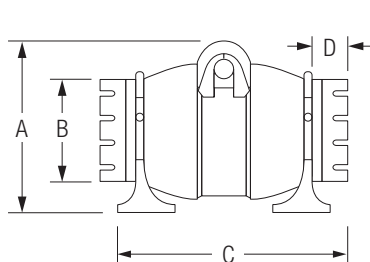


ELLP125

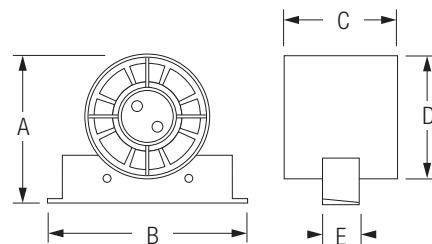

EL125

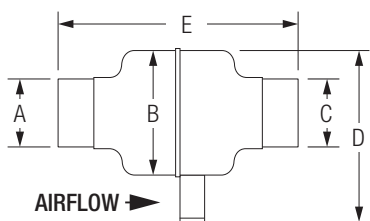

EL100

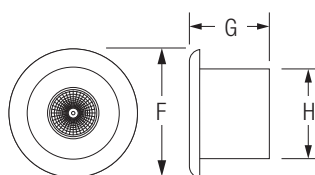

Diffuser

Technical

Model	ELLP150	ELLP125	EL150	EL125	EL100
Supply	220-240V AC, 50Hz				
Halogen Lamp	12V 50W				
Total Wattage	68W	90W	68W	70W	70W
Sound Level	38 dB(A)	43 dB(A)	38 dB(A)	41 dB(A)	45 dB(A)
Max. Operating Temp	45°C	45°C	45°C	40°C	40°C
IP Rating	IP44	IPX4	IP44	IPX4	IPX4
Duct	6m Black Unilok		5m Flexible PVC	4m Flexible PVC	3m Flexible PVC