

Torpedo DC

MIXFLOW INLINE FAN WITH VARIABLE BOOST SETTING

Allows Continuous Extract with Manual Switch to Boost



This high performing variable speed mixflow fan is designed for longer ducts and large rooms. A quiet powerhouse ideal for high-condensation and mould prone areas.

- Energy efficient DC motor for quiet operation
- Selectable 24/7 continuous trickle ventilation, 10 minute run on timer, or standard on/off operation
- Continuous setting for well-sealed new homes
- Variable fan speed to easily set boost level airflow & noise levels
- Motor can be rotated within its housing bracket for installation flexibility



TORPDC150 Designed for G4 Bathrooms and Kitchens ceiling installations on 24/7 continuous and/or boost full speed with up to 6m duct length, 2 x 90° bends and a soffit mounted fixed louve grille.

Accessories

DCT0411	Ø150mm 6m Complex Ducting (or any Manrose 150mm duct)
DCT0063	Ø150mm external fixed grille
DCT1550	Ø150mm EasyFit White Round Interior Grille



TORPDC100 Designed for G4 Bathrooms ceiling installations on full speed boost mode, with up to 3m duct length, 2 x 90° bends and a soffit mounted fixed louve grille.

Accessories

DCT0367	Ø100mm 3m Complex Ducting (or any Manrose 100mm ducting)
DCT0025	Ø100mm external grille
DCT2185	Ø100mm White Round Interior Grille



Ultra efficient 3 in 1 featuring 24/7 continuous or timed mould reduction technology for a healthier home.




Torpedo DC


MIXFLOW INLINE FAN WITH VARIABLE BOOST SETTING



AIRFLOW PRESSURE

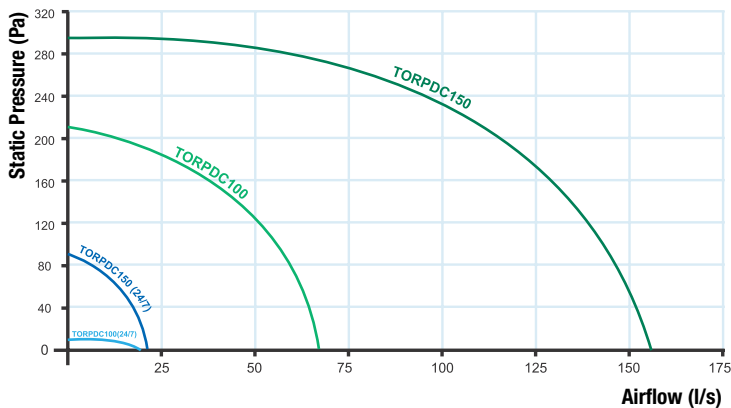

DIMENSIONS (mm)

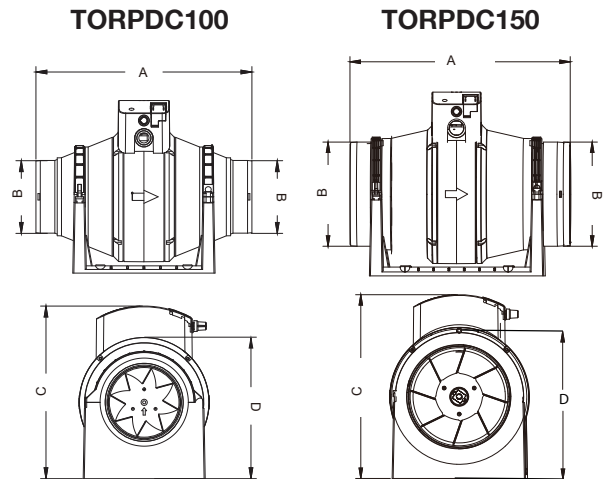


	A	B	C	D
TORPDC100	297.2	Ø100	237.5	173
TORPDC150	317.2	Ø150	264.6	200

EXHAUST

Model	TORPDC100	TORPDC150
Motor Type	DC	DC
Rated Voltage	220-240V~ 50Hz	220-240V~ 50Hz
IP Rating	IPX4	IPX4
Ball Bearing	Yes	Yes
Backdraft Stopper	Yes	Yes
Duct Size	Ø100mm	Ø150mm
Min. Install Depth	238mm	265mm

	24/7	Standard	24/7	Standard
Free Air Delivery	19 l/s	67 l/s	18 l/s	156 l/s
Motor Power	10 Watts	10-28 Watts	2.4 Watts	2.4-40 Watts
Noise Level (at 3 metres)	29dB(A)	37dB(A)	24dB(A)	47dB(A)

WIRING DIAGRAM FOR 24/7 CONTINUOUS

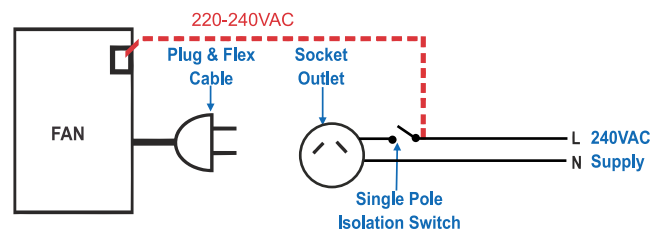



COMPONENTS:

- 1 x Inline Fan
- 1 x Instruction Manual
- 1 x Warranty card

Installation: Electrician required*

Warranty: 3 Years

SELECTABLE SWITCH



Standard
Simply turn on or off as required.

24/7 Continuous Trickle Extraction
Creates a healthier living environment by encouraging constant air change.

10 Minute Run On Timer
Continues to operate for 10 minutes after switching off.

ventair
THE AIR MOVEMENT SPECIALISTS

Distributed by Simx Limited

1 Haliday Place, East Tamaki
Auckland, 2013

T: +64 (9) 259 1660

E: sales@simx.co.nz

www.simx.co.nz | f @ in

PUB1903 2510